


# Conserve Water... it's Precious

### Facts...

- The average swimming pool has 15,000 gallons of water.
- ONE ZeroFlush Urinal can save 3 swimming pools worth of water in just one year.
- ONE ZeroFlush urinal will pay off in less than a year with savings on water, sewage and maintenance costs.
- Unlike competitors, our Odor Barrier Oil is 100% bio-degradable and will not break down when using the strongest cleaning agents.
- ZeroFlush urinals are environmentally friendly and help reduce the growing amount of sewage to save our already heavily taxed municipal waste water infrastructure.



## Models...

#### OUR SLEEK MODERN DESIGNS HELP REDUCE SPLASH AND KEEP FLOORS DRIER.







#### **ALL MODELS INCLUDE...**

- Mounting Hardware
- Wall Bracket
- Drain Flange Coupler
- · Odor Barrier Liquid
- Insert Key
- · Installation Instructions
- · Drain Insert
- Maintenance Instructions

#### REPLACEMENT KIT INCLUDES...

- 2 Drain Inserts
- · 2 Insert Removal Tools
- 2 Odor Barrier Oil\*



Odor Barrier Replacement Kit 38-3087KIT

<sup>\*</sup>Chemical free and 100% environmentally friendly

### How it works...

- 1. Install drain insert
- 2. Trap complete
- 3. Add water followed by all natural odor barrier
- 4. Trap ready for use
- 5. First use
- 6. Ongoing use

## No More ...

- · Odors
- · Difficult installations
- Leaky valves
- Urinal cakes
- · Wasteful flushing

## Reduce...

Maintenance, water & sewer costs

## Cleaning & Insert Maintenance

## **Regular Cleaning**

As with any other urinal (water & no water), ZeroFlush urinals should be cleaned on a regular basis. Simply spray any nonabrasive agent on the urinal and wipe clean. No more scrubbing or harmful chemicals.

### **Insert Replacement**

- A. Remove the drain insert with the tool provided. Any remaining odor sealer fluid and any urine inside the waste trap will automatically flush away down the waste pipe.
- B. Rinse the waste line with a bucket of water.
- C. Install new drain insert into the housing.
- D. Add 32 oz. of water.
- E. Pour in odor sealer fluid through the drain insert and the urinal is ready for use.





At no time will the person replacing the odor sealer fluid come in contact with urine.


# THE ZEROFLUSH INSERT IS FOUR TIMES LARGER THAN THE COMPETITION, SO THERE ARE LESS REPLACEMENTS AND LONGER USAGE

#### ZeroFlush™ Housing Unit

Insert is removable by pulling upward with removal tool.

Larger passageway allows

fluid to flow without build-up.



When the insert is removed, fluids travel down the drain pipe.

**Competitor Housing Unit** 


The entire housing unit is removed; Sediment and urine are trapped inside.



Note narrow passageway.

The ZeroFlush<sup>TM</sup> housing unit is the largest on the market. The space allows for fluid to travel through without sediment build-up and clogging.

Competitor bousing units are smaller, and the passageway for fluid is narrow. This allows for sediment to build up, and can cause clogging.

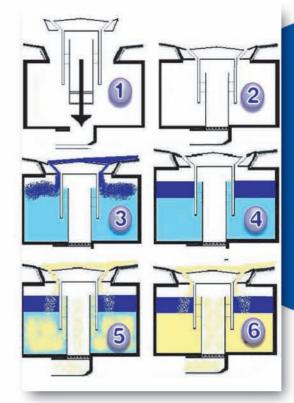

After approximately 15,000 uses, blue drops of Odor Barrier Oil will appear on the insert cover. This indicates it's time to replace the insert and Odor Barrier Oil.

## Model Specifications

All Urinals are ADA compliant &

#### **Model 101 Specifications:**

**Dimensions:** 

19"W x 28"H x15.5"D

**Rough-In:** 

For 24" lip height, drain center

line must be 17" from floor

Approx. Weight: 60 lbs.

Color:

White, Vitreous China

**Item No.:** 38-3084ZF



#### **Model 201 Specifications:**

**Dimensions:** 

15.9"W x 24.8"H x15.5"D

**Rough-In:** 

For 24" lip height, drain center

line must be 17" from floor

Approx. Weight: 40 lbs.

Color:

White, Vitreous China

Item No.:

38-3085ZF



#### **Model 501 Specifications:**

**Dimensions:** 

13.25"W x 19.5"H x13"D

**Rough-In:** 

For 24" lip height, drain center

line must be 17" from floor

Approx. Weight: 30 lbs.

**Color:** 

White, Vitreous China

Item No.:

38-3088ZF



SAVE WATER. SAVE MONEY.